


Faux Header and Header/Beam Wrap

Installation Detail 1.1

Faux Header

Header/Beam Wrap

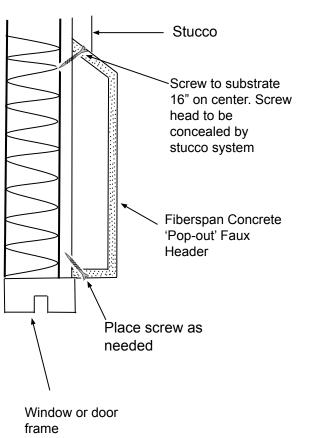

Stucco Screw to substrate 16" on center. Screw head to be concealed by stucco system Fiberspan Concrete 'L' Shape Screw to substrate 16" on Header/Beam center. Optional: Conceal screw under window/door frame Window or door frame

Available custom dimensions
Header can be fabricated in any
height up to 11-½".

Maximum return thickness: 1-5%".

Minimum return thickness: 1".

Lengths over 9' will be made in 2
equal sections.

Actual thickness of Faux Header is approx 1/4".

Available custom dimensions
Header/Beam Wrap can be
fabricated in any height up to

Maximum return depth 8". Height and depth can be any measurement up to the maximum

Thickness of Header/Beam Wrap is approx 1/4".

Fiberspan Concrete Elements